

Radar Sensor Solutions



Radar Sensing

The ultimate outdoor sensing solution

Benefits of Radar Sensing

Resistant to wind, rain, snow, fog and sunlight



Long sensing range



No moving parts, durable, less downtime



Wide operating range to function in extreme outdoor environments



Detects moving and stationary objects



Operating Frequency


The longer wavelength of 24 GHz radar makes it the most robust solution for ignoring heavy falling rain and snow, while the shorter wavelength of 122 GHz radar provides more precise measurements and allows it to detect a wider range of targets, including the weak targets that 24 GHz typically cannot sense.

24 GHz


- Long range
- Most robust outdoors

122 GHz

- Better accuracy
- Can see a wider range of dielectric materials

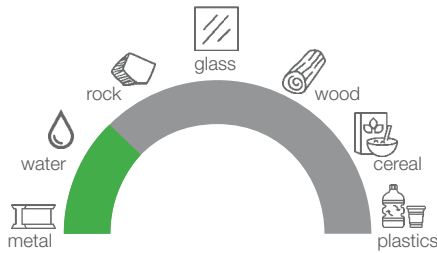

Metal, water and other high-dielectric materials provide a stronger return signal than plastics, cloth, wood, fiberglass or organic material.

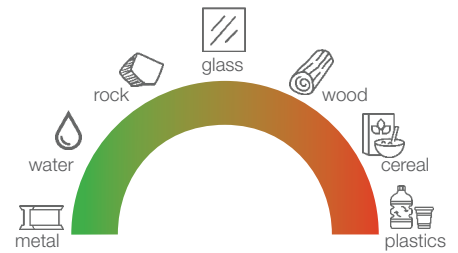


Beam Pattern Considerations

Radar Sensors are available in narrow and wide beam patterns. Narrow beam patterns avoid false detection of objects outside of the region of interest and allow for a more precise measurement, while wide beam patterns provide coverage of larger areas and provide more robust detection of irregular surfaces and targets presented at steep angles.

Narrow Beam Applications

- Drive-through
- Gantry crane
- Overhead crane
- Loading docks




Wide Beam Applications

- Mobile equipment collision avoidance
- Vehicle detection: Train, car, boats




	T30R 	QT50R 	Q120R 	Q240R 	Q130R 
Sensing Mode	Adjustable-field, Retroreflective	Adjustable-field or Retroreflective	Adjustable-field	Adjustable-field	Adjustable-field
Frequency	122 GHz	24 GHz	24 GHz	24 GHz	24 GHz
Max. Range (m)	10 or 15	3.5, 12, or 24	12, 26, or 40	40 or 100	24 or 40
Number of Zones	2	1 or 2	1 or 2	2	1
Beam Pattern (Horz x Vert)	15° x 15° or 45° x 45°	90° x 76°	24° x 50°	11° x 13°	90° x 76° or 24° x 50°
Output	Analog & Discrete with IO-Link, Dual-discrete with IO-Link and Pulse Pro	Single, Dual-discrete or Discrete and Analog	Single or Dual-discrete	Dual-discrete or Discrete and Analog	Single discrete
Configuration	PC GUI, IO-Link, Remote Teach, Push Buttons	DIP Switch	DIP Switch	DIP Switch	PC GUI or Remote Teach
Country or Region of Compliance	US, Europe, Australia/New Zealand, Malaysia	US, Europe, China, Brazil, Japan, South Korea, Australia/New Zealand, Singapore, Taiwan, Canada	US, Europe, China, Brazil, Japan, South Korea, Australia/New Zealand, Singapore	US, Europe, China, Brazil, Japan, South Korea, Singapore, Taiwan, Canada, Mexico, Australia/New Zealand	US, Europe, China, Australia/New Zealand, Brazil

Adjustable-Field (Diffuse) and Retroreflective Radar Sensors



An adjustable-field radar sensor can detect vehicles and other objects by sensing the reflection of the radio waves bouncing off the object.




A retroreflective radar sensor uses a taught reference condition like a wall, floor, or special retroreflective target. The sensor detects objects between it and the reference target by looking for disruptions in the signal coming back from the reference target.

Retroreflective sensing has the most reliable detection with no dead zone. The output will turn on even if the object being sensed does not reflect the signal back to the sensor, as long as it blocks or disrupts the signal from the reference target.

Configuration

DIP Switch Configuration

- Easy to set up
- No PC required



GUI Configuration

- Clear visual the entire sensor view for setup and troubleshooting
- Tamper-proof



Remote Teach

- Remotely configure sensor
- No manual interaction required



IO-Link

- Read & change device remotely
- Dynamically change parameters



Push Button


- Simple configuration
- Click and teach



Collision Avoidance

In many industries including ports, mining, and agriculture, mobile equipment is a large investment and if damaged, results in downtime and requires costly repair or replacement. Banner Engineering's radar sensors are the perfect rugged solution for collision avoidance applications, even in harsh outdoor conditions. Sensing functions are unaffected by wind, rain or snow, fog, sunlight, humidity, and fluctuating air temperatures. The sensors also utilize a robust steady-state design that is more durable than laser products with moving parts.

(Indoor) Overhead Crane in Dusty or Harsh Environments

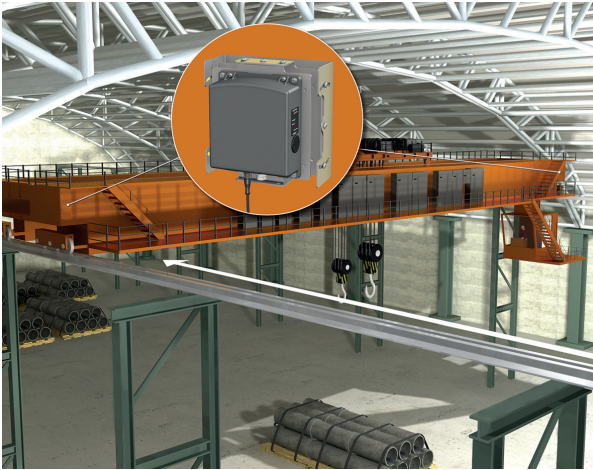


Challenge

Detection from cranes to prevent collision during operation can be extra challenging in dusty or harsh environments.

Solution

- The narrow beam Q240R is used to avoid the roof and other indoor obstacles
- Radar works in dusty environments where laser products are not as reliable
- It has no moving parts and a rugged design that resists high-shock and vibration conditions and is a more reliable solution than traditional laser scanner solutions



Narrow Beam Radar Sensors

Collision Avoidance




Challenge

Collision avoidance solutions for mining equipment minimize the risk of accidents, save costs, and improve efficiency. Poor visibility, blind spots, dust and debris, and ambient weather conditions can reduce the effectiveness of collision avoidance measures.

Solution


- Q130RA radar sensors are installed at the front and rear of mining vehicles and provide active object detection in vehicle blind spots
- The Q130RA is unaffected by dirt, dust, wind, rain, and other environmental challenges
- The IP67 housing ensures reliable operation even in harsh conditions



PC GUI Configuration



Crane-to-Crane Proximity Detection

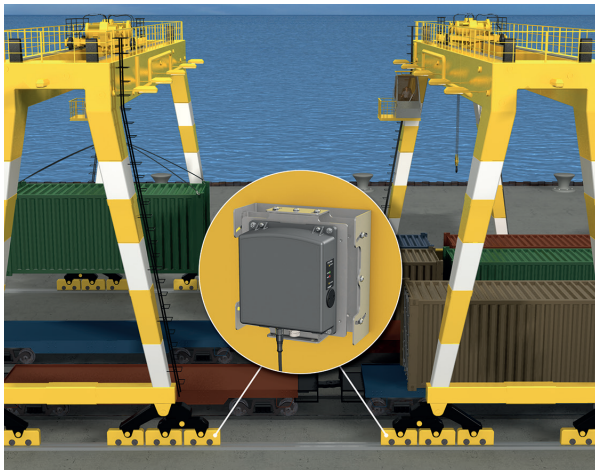


Challenge

When multiple cranes are moving in tight spaces, it's imperative to ignore adjacent shipping containers while reliably detecting the presence of another crane or obstacle to activate stop or warning signals for the operator.

Solution

- The Q240R radar sensor is ideal for monitoring a specific area without detecting adjacent objects, featuring a very narrow 11° by 13° beam pattern
- With two independent adjustable sensing zones, the sensor provides far and near proximity warning signs with the capability to detect objects up to 100 m away
- Extremely robust; provides reliable detection capabilities, ideal for outdoor applications



Dual Zone

RTG Collision Avoidance



Challenge

Rubber tire gantry cranes (RTG) are used in port and mobile equipment industries to transport heavy and cumbersome loads. Since RTG cranes are hauling such large loads, it is vital to ensure they move safely throughout the port area to avoid collisions.

Solution

- The Q120R radar sensor has a narrow beam pattern, high sensitivity, and long range detection to view obstacles in the way of the crane
- The sensor has no moving parts and a rugged design that resists high-shock and vibration conditions better than laser scanners



No Moving Parts

Vehicle Detection

Radar sensors use Frequency Modulated Continuous Wave (FMCW) technology to reliably detect targets, including cranes, cars, trains, trucks, and cargo in extreme weather conditions. FMCW radar is an ideal solution for these applications since it can detect moving and stationary objects in all weather conditions.

The ability to reliably detect vehicles offers significant advantages for asset management, resource allocation, site safety, traffic control, and loading dock management. Application needs and deployment requirements can be diverse, ranging from indoor, outdoor, and partially protected.

Loading Dock Monitoring, Vehicle Counting




Challenge

For an efficient flow of products in and out of a truck, it is important that operators are immediately notified of a truck's arrival. In order to accurately detect the presence of vehicles at a loading dock, a reliable sensor is needed to withstand extreme weather conditions.

Solution

- The T30R can be set up as a retroreflective sensor to provide the most reliable detection with no dead zone
- Compact housing for simple installation



Retroreflective Sensing

Gates and Drive Thru




Challenge

Drive thru applications require reliable vehicle detection to alert employees to a customer's presence at a window, count cars passing through, monitor time spent in the drive thru, and more. Vehicle detection devices can be susceptible to tampering by customers or staff.

Solution

- Q130RA radar sensors reliably detect both stationary and moving vehicles, regardless of shape or color
- The Q130RA is easily configured using an intuitive graphical user interface and is resistant to tampering
- The software also allows users to easily copy configurations from one sensor to another for faster setup



PC GUI Configuration



Boats on Waterways, Locks and Dams; Shipyard Logistics




Challenge

To establish and maintain an efficient operating routine, all vessel traffic must be monitored as it enters and exits ports. Ship detection can be difficult because of local wind and wave conditions, ship size/type, and close range noise. Sensing solutions must accurately detect a ship's arrival.

Solution

- The Q120R radar sensor functions are unaffected by wind, rain, fog, light, humidity, and air temperature, making it ideal for outdoor harbor conditions
- The radar sensor detects objects up to a specified distance, ignoring objects and backgrounds beyond the set point, allowing for accurate ship detection



DIP Switches Configurable

Train Detection Including Flatbeds and Tank Cars




Challenge

Railways present many difficulties for sensing equipment. The harsh and dirty environment is extra challenging. Passing trains create high winds and kick up dirt. Proper identification of the content on cargo trains is essential. Radar sensors detect container trains to activate RFID antennas.

Solution

- The Q130R radar sensor is an effective alternative to ultrasonic or photoelectric sensors
- Radar technology is unaffected by wind or by dust and dirt build-up on the sensor
- FMCW radar can detect both stationary and moving targets for a more reliable solution than doppler radar



Resistant to Weather



Activation of Cameras



Challenge

Trucks pass the inspection zone, where radar sensors activate cameras to verify the cargo matches the corresponding customs declaration information.

Solution

- The QT50R radar sensor is installed to sense large vehicles
- The adjustable sensing field allows it to ignore objects beyond the setpoint
- The rugged IP67 housing and radar technology is immune to weather and light changes



Wide Beam Radar Sensors

Car Wash



Challenge

Reliably detecting a vehicle in a carwash can be problematic. Steam, fog, water spray, and temperature changes are challenging for many sensors.

Solution

- The T30R can ignore fog, steam, and water to reliably detect the vehicle
- The IP67-rated housing dependably operates in a wet environment
- Superior temperature stability provides consistent measurements even during extreme temperature swings




Resistant to Weather

Positioning Feedback

Precise positioning of industrial equipment is important to prevent damage and reduce downtime, but challenging environmental conditions including rain, snow, fog, sun, and wind can make it difficult for operators to see and can impact the reliability of other sensor technology. The Banner radar provides reliable outdoor performance and the 122 GHz models provide the accurate measurements and short deadzones often required for these applications. Dual discrete outputs are available for slow and stop positions for port equipment, such as reach stackers and container handlers. Analog and IO-Link options are also available for absolute distance measurement values to guide the approach of ground support equipment, such as baggage handlers or de-icing vehicles.

Reach Stacker

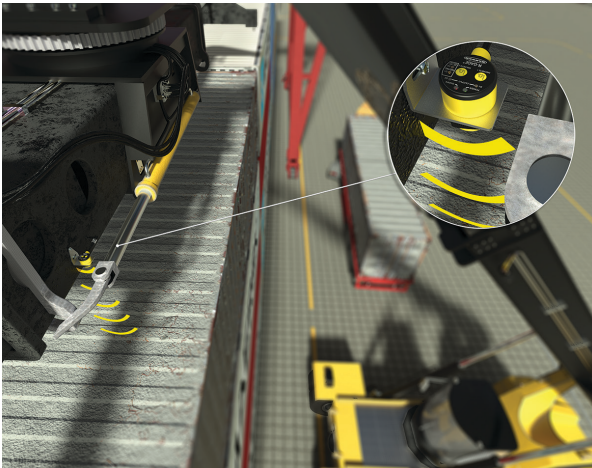


Challenge

At large ports, shipping containers need to be quickly and safely moved from one place to another. Because of this speed, lifting equipment often collides with containers resulting in lost time and damaged goods and equipment.

Solution

- The T30R with dual discrete outputs can provide collision protection with safe speed and stop positions
- The robust IP67 housing and radar beam is ideal for working outdoors



Dual Zone

Ground Support Equipment



Challenge

Damaging an airplane results in expensive repairs and disruptive delays as any contact with the aircraft requires it to be pulled from service for inspection. New standards are requiring ground support equipment such as baggage handlers to be equipped with collision avoidance sensors such as the T30R.

Solution

- The T30R measures the distance of ground support equipment from the aircraft and signals an alert when it reaches a programmed distance to prevent collisions
- The T30R's 45° beam pattern reliably detects curved surfaces, such as the body of an airplane
- Radar sensors are resistant to ambient weather and temperature changes



Precise Detection



Wide Beam Radar Sensors

Radar Configuration Software Overview

Easy setup and configuration of range, sensitivity, and output using the Banner Radar Configuration Software and Pro-Kit with Converter Cable.

- Get up and running in 3 easy steps: simply set the switch point distance, signal strength threshold, and response time using the intuitive configuration software. Now the radar sensor is ready to begin detecting targets.
- Easily monitor status via the software or bright on-board LED indicators
- Visualize the application in real-time
- Make adjustments to settings on the fly

Navigation Toolbar


Connect to the sensor, save or load a configuration, or reset to factory defaults

Live Sensor Data and Legend

Signal strength versus distance, select options to display data on the graph

Summary pane

Displays the distance to the target, the signal strength, and the output status

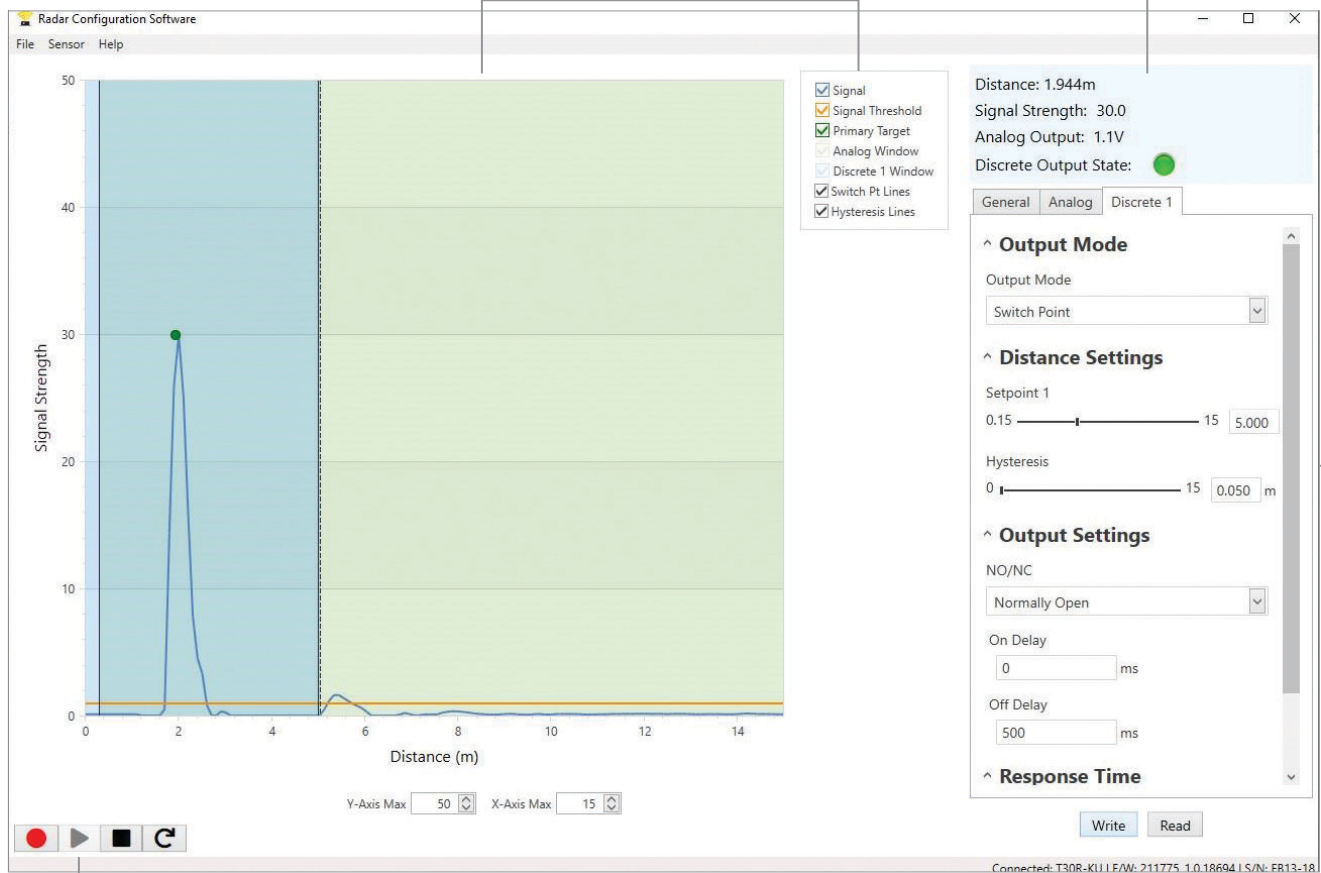

Live Sensor Data Controls

Record, freeze and play real-time sensor data

Status Bar

Shows that the sensor is connected, a software update is available, and if the sensor data is being recorded to a file

Sensor Settings

Set the sensor parameters

T30R Series

Sensors use two independent, adjustable sensing zones and operate at 122 GHz, which enables higher precision measurements with a narrow or wide beam patterns up to 15 meters away.

Bridges the Gap Between Radar & Ultrasonics

- Compact, rugged IP67 housing for dependable, long-term operation in harsh environments
- Detects a wider range of targets than traditional 24 GHz radar including reliable detection of high-dielectric materials like metal as well as lower dielectric materials like wood, rock, or organic material
- Dual discrete outputs for slow and stop positions or analog and IO-Link for absolute measurement values
- Radar Configuration software, IO-Link, remote teach, and push buttons for flexible set-up and configuration
- Pulse Pro output for direct integration with Banner lights, giving direct process feedback that only requires power; no controller needed
- The T30R-1515 offers the most precise measurement and ignores objects outside of a region of interest making it ideal for vehicle detection, tank level monitoring and positioning feedback
- For the most reliable detection, the T30R-4545 should be used on large, strong targets such as vehicles, trains, or airplanes



Model	Beam Pattern	Range	Telecom Approval	Output
T30R-1515-KDQ	15°x15°	15 m	US, Europe, Australia/New Zealand, Malaysia	2 Discrete (NPN/PNP configurable) with IO-Link and Pulse-Pro
T30R-1515-KIQ	15°x15°	15 m	US, Europe, Australia/New Zealand, Malaysia	1 Analog (4 -20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link
T30R-1515-KUQ	15°x15°	15 m	US, Europe, Australia/New Zealand, Malaysia	1 Analog (0 -10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link
T30R-4545-KDQ	45°x45°	10 m	US, Europe, Australia/New Zealand, Malaysia	2 Discrete (NPN/PNP configurable) with IO-Link and Pulse-Pro
T30R-4545-KIQ	45°x45°	10 m	US, Europe, Australia/New Zealand, Malaysia	1 Analog (4 -20 mA) 1 Selectable Discrete (PNP/NPN) with IO-Link
T30R-4545-KUQ	45°x45°	10 m	US, Europe, Australia/New Zealand, Malaysia	1 Analog (0 -10 V) 1 Selectable Discrete (PNP/NPN) with IO-Link

To order the pigtail QD model, add a "P" to the end of the model number (e.g., T30R-1515-KDQP)

Optional Accessories and Mounting Brackets

SMB30A	12-gauge stainless steel right-angle bracket with curved mounting slots for versatile orientation. Mounting hole for 30 mm sensor.
SMB30MM	12-gauge stainless steel bracket with curved mounting slots for versatile orientation. Clearance for M6 (1/4 in.) hardware.
SMB30SC	Split clamp with swivel bracket with 30 mm mounting hole for sensor, black reinforced thermoplastic polyester. Stainless steel mounting hardware included.
SMB30FA	Swivel bracket with tilt and pan movement. 30 mm mounting hole. 3/8-16x2 in. bolt thread mount.
SMBT30RTM	12-gauge stainless steel bracket used to mount on the outside of plastic tanks for tank level monitoring
SAFT30R-PVC	PVC M30 to 2 inch NPT adapter
PRO-KIT	Pro Series Accessory Kit includes: Converter Cable, Splitter, and Power Supply
MQDEC2-506	2 m cordset (other lengths available)



SMB30A




SMB30MM




SMB30SC



SMB30FA



SMBT30RTM



SAFT30R-PVC



PRO-KIT
Required for PC
configuration

Q130RA Series

Sensors use one adjustable sensing zone to reliably detect moving or stationary objects up to 40 meters away.



PC GUI Configurable, Narrow and Wide Beam Sensor

- Reliable detection of moving and stationary targets
- Simple setup and precise control with intuitive graphical user interface
- Unaffected by ambient weather, including rain, snow, fog, sunlight, and temperatures from -40 to 65° C
- Rugged IP67 housing for dependable long-term operation in harsh environments
- Features half the dead zone of previous US radar products
- 90.8 x 170.5 mm rectangular housing

Model	Beam Pattern	Range	Telecom Approval	Output
Q130RA-9076-AFQ	90°x76°	24 m	US, Europe, China, Australia/New Zealand, Brazil	Bipolar NPN/PNP N.O/N.C. Configurable
Q130RA-2450-AFQ	24°x50°	40 m		

Optional Accessories and Mounting Brackets

SMBWSQ120	Heavy-duty, rear-mount protective rain cover
SMBQ240SS1	2-piece bracket, provides ±20° of tilt on one axis
SMBQ240SS2	Can be used with SMBQ240SS1 for ± 20° tilt on second axis
SMBQ240SS3	Full bracket assembly, ±20° of tilt in all directions (SS1 + SS2)
MQDEC2-506	2 m cordset (other lengths available)
MQDC-506-USB	Pro Converter Cable, 1.83 m M12/Euro-style quick disconnect to Device and USB to PC, Required for connection to configuration software
QS130WS	Rain cover for Q130RA with hydrophobic coating to repel rain and prevent snow build up



MQDC-506-USB




SMBWSQ120



SMBQ240SS1



SMBQ240SS2



SMBQ240SS3



Q130WS

Q240RA Series

Sensors use two independent, adjustable sensing zones to reliably detect moving or stationary objects within a narrow beam pattern up to 100 meters away.

Narrowest Beam, Longest Range Sensor

- Narrow 11° × 13° beam pattern (± 5.5/6.5)
- Two independent adjustable sensing zones
- Range: up to 100 meters
- 187 x 160 x 55 mm rectangular housing
- Rugged IP67 housing withstands harsh environments




Model	Range	Telecom Approval	Output
Q240RA-US-AF2Q	40 m	US, Canada, Brazil, Mexico, Taiwan	2 Discrete (NPN/PNP configurable)
Q240RA-EU-AF2Q		US, Europe, Australia/New Zealand, Brazil	
Q240RA-CN-AF2Q		Japan, Singapore, South Korea China	
Q240RA-US-AF2LQ	100 m	US, Canada, Brazil, Mexico, Taiwan	2 Discrete (NPN/PNP configurable)
Q240RA-EU-AF2LQ		US, Europe, Australia/New Zealand, Brazil	
Q240RA-CN-AF2LQ		Japan, Singapore, South Korea China	
Q240RA-US-ULQ	100 m	US, Canada, Brazil, Mexico, Taiwan	1 Analog (0 -10 V) and 1 Selectable NPN/PNP
Q240RA-EU-ULQ		US, Europe, Australia/New Zealand, Brazil	
Q240RA-CN-ULQ		Japan, Singapore, South Korea China	
Q240RA-US-ILQ	100 m	US, Canada, Brazil, Mexico, Taiwan	1 Analog (4 -20 mA) and 1 Selectable NPN/PNP
Q240RA-EU-ILQ		US, Europe, Australia/New Zealand, Brazil	
Q240RA-CN-ILQ		Japan, Singapore, South Korea China	

Optional Accessories and Mounting Brackets

Q240WS	Rain cover for Q240RA with hydrophobic coating to repel rain and prevent snow build up
SMBQ240SS1	2-piece bracket, provides ±20° of tilt on one axis
SMBQ240SS2	Can be used with SMBQ240SS1 for ± 20° tilt on second axis
SMBQ240SS3	Full bracket assembly, ±20° of tilt in all directions (SS1 + SS2)
MQDEC2-506	2 m cordset (other lengths available)




Q240WS



SMBQ240SS1



SMBQ240SS2



SMBQ240SS3

Q120RA Series

Sensors use one or two independent, adjustable sensing zones to reliably detect moving or stationary objects up to 40+ meters away.

Highest Sensitivity, Long Range, Narrow Beam Sensor

- Narrow total beam pattern: horizontal: 24° (± 12), vertical: 50° (± 25)
- One or two independent adjustable sensing zones
- Range: up to 40 meters
- 90.8 x 159.5 mm rectangular housing
- Rugged IP67 housing withstands harsh environments



Model	Range	Telecom Approval	Output
Q120RA-US-AFQ	12 m	US and Brazil	Bipolar NPN/PNP
Q120RA-EU-AFQ		Europe, Australia/New Zealand, Japan and China	
Q120RA-KR-AFQ		South Korea*	
Q120RA-US-AF2WQ	26 m	US	2 Discrete (NPN/PNP configurable)
Q120RA-EU-AF2WQ		Europe, Australia/New Zealand, Japan and China	
Q120RA-KR-AF2WQ		South Korea*	
Q120RA-US-AF2Q	40 m	US and Brazil	2 Discrete (NPN/PNP configurable)
Q120RA-EU-AF2Q		Europe, Australia/New Zealand, Japan and China	
Q120RA-KR-AF2Q		South Korea*	

For 5-wire 2 m integral cable versions, remove suffix Q from the model number (e.g. Q120RA-EU-AF).


* Models for South Korea: 12 to 24 V dc

Optional Accessories and Mounting Brackets

SMBWSQ120	Heavy-duty, rear-mount protective rain cover for Q120RA (sensor face must be kept free of heavy water and ice build-up)
SMBQ240SS1	2-piece bracket, provides ±20° of tilt on one axis
SMBQ240SS2	Can be used with SMBQ240SS1 for ± 20° tilt on second axis
SMBQ240SS3	Full bracket assembly, ±20° of tilt in all directions (SS1 + SS2)
MQDEC2-506	2 m cordset (other lengths available)




SMBWSQ120



SMBQ240SS1



SMBQ240SS2



SMBQ240SS3

QT50R Series

QT50R series is available in both adjustable-field models, which can use diffuse sensing to detect an object, or in retroreflective models which use a reference signal retroreflective target, floor, wall, or other stationary object) for reliable detection of weak objects.


QT50R-AF



Widest Beam, Small Package

- Detects objects up to 24 m away
- Analog and discrete outputs available
- One or two independent adjustable sensing zones
- Total beam pattern 90° (± 45) x 76° (± 38)
- Rugged IP67 housing withstands harsh environments

QT50R-RH



Robust Retroreflective Sensing Mode

- Detects objects up to 12 m
- Effective beam equals size of retro target
- Ignores objects in the background beyond the retroreflective target
- Rugged IP67 housing withstands harsh environments

Model	Range	Telecom Approval	Output	Sensing Mode
QT50R-US-AFHQ	24 m	US, Canada and Brazil	Bipolar NPN/PNP	Adjustable-field
QT50R-EU-AFHQ		US, Europe, Australia/New Zealand, Japan, China		
QT50R-KR-AFHQ		South Korea*		
QT50R-TW-AFHQ		Taiwan		
QT50R-SG-AFHQ		Singapore		
QT50R-US-AF2Q	24 m	US, Canada and Brazil	2x Selectable NPN/PNP	Adjustable-field
QT50R-EU-AF2Q		US, Europe, Australia/New Zealand, Japan, China		
QT50R-KR-AF2Q		South Korea		
QT50R-TW-AF2Q		Taiwan		
QT50R-EU-AF2UQP	24 m	US, Europe, Australia/New Zealand	2x Selectable NPN/PNP and 0 -10 V analog	Adjustable-field
QT50R-EU-AFSQ	3.5 m	US, Europe, Australia/New Zealand, Japan, China	Bipolar NPN/PNP	Adjustable-field
QT50R-KR-AFSQ		South Korea*		
QT50R-US-RHQ	0 to 12 m	US, Canada and Brazil	Bipolar NPN/PNP	Retroreflective
QT50R-EU-RHQ		US, Europe, Australia/New Zealand, Japan, China		
QT50R-KR-RHQ		South Korea		
QT50R-TW-RHQ		Taiwan		

For 5-wire 2 m integral cable versions, remove suffix Q from the model number (e.g. QT50R-EU-AFH)

* Models for South Korea: 12 to 24 V dc

Optional Accessories and Mounting Brackets

BRTR-CC20E	Retroreflective target for use with QT50R retroreflective model (required accessory). Large corner-cube reflector in protective plastic enclosure. For use with -RH models.
QT50RCK	Weather deflector, includes mounting hardware (sensor face must be kept free of heavy water and ice build-up)
SMB30SC	Split clamp with swivel bracket with 30 mm mounting hole for sensor, black reinforced thermoplastic polyester. Stainless steel mounting hardware included.
SMB30MM	12-gauge stainless steel bracket with curved mounting slots for versatile orientation. Mounting hole for 30 mm sensor.
MQDEC2-506	2 m cordset (other lengths available)
QT50RWS	Rain cover for QT50R with hydrophobic coating to repel rain and prevent snow build up



BRTR-CC20E




QT50RCK



SMB30SC



SMB30MM



QT50RWS



Who is Banner?

Every 3.5 seconds, a Banner sensor is installed somewhere in the world. Banner solves problems for most of the manufacturing companies in the Fortune 500, as well as the startups changing industry with leading-edge production.

Banner technology supports manufacturing of the cars you drive, the food you eat, the medicine you take and virtually every product in your daily life. Whatever the industry, Banner offers solutions to automate production, improve efficiency and manufacture to the highest standard of quality.

Manufacturing Specialists

With over 30,000 products, Banner is a leading source for manufacturing needs. We offer award-winning sensors, wireless solutions, vision sensors and lighting, machine safety, indicator lights and LED lighting.

Application Solution Experts

Our field sales engineers are the most highly-trained and experienced professionals in the industry. They can rapidly analyze an application to help you find the best solution.

Global Presence

Banner offers worldwide sales and support through a network of more than 3,000 professionals ready to help you no matter where you are located.

Unique Solutions

Banner's growing product line includes thousands of standard products. However, if you have an application requiring a unique solution or direct integration of a Banner product, contact one of Banner's Application Engineers to learn about our rapid customization and ability to deliver special product variations.

Talk with an app engineer.
Get product specs.
Order now.

